



# ALPIN



The vertical platformlift for lifting heights up to 4m

The “Alpin Z300” vertical platform lift is an economic and efficient alternative to elevators. It is designed for convenient use by the elderly or handicapped, occupying minimum space for a simple retrofitting without structural modification or additional building work.

The model without shaft structure and with open cabin represents a minimal visual obstruction and can be well integrated into the architectural background. A robust double chain drive system ensures a reliable performance of the lift, even in cold winter conditions and reduces the need for maintenance to a minimum.



Lift with 70mm pit and execution in **stainless steel**

**Glas shaft** with steel or aluminium frame as an option



# ALPIN

## Free-standing

The free-standing drive tower permits a fast and simple installation with only minimum constructual works required on site.

## Quality and safety

TÜV certified! Fulfills highest safety standards and is built according to the valid European norm EN 81-41.

## Reliable

Especially designed for outside installation, the double-chain drive and the robust electrics provide for a safe drive and a low-maintenance operation.

**Glas shaft** with roof and special colour





**Special RAL colour** for parts of the lift installation

**Wall fixing of the drive tower** for a space saving installation

## Main advantages of the Alpin platformlift

- Up to 4m lifting height
- Smooth and stable drive
- Drive tower to be mounted in 1 piece for a fast and simple installation
- Reliable and safe double-chain drive
- Special platform sizes are possible
- Option with glas shaft
- Entry-exit on same side or at 90°
- Available in any RAL colour
- Available in stainless steel
- Optional with automatic gate opener




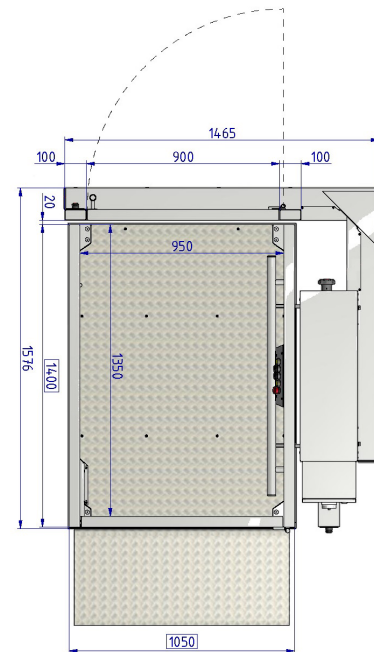


Upper gate can be **manual or automatic**

Upper gate with **automatic door opener**

### Alpin - Technical Specification

Loading capacity	300kg
Lifting height	4000 mm
Standard platform size	1050 x 1400 mm
Drive system	Double chain-drive
Lifting speed	0,11 m/s
Min. platform height	70 mm
Standard colour	RAL 9007
Noise level	Under 60dB
Temperature range	+45°C down to -30°C
Drive motor	1,5 kW
Power supply	3×380V / 50Hz (Optional 1x230V)
Certificate	 TÜV certified to EN 81-41



## Together we provide accessibility!

For further information please contact:



Platform stairlifts



Chair stairlifts



Vertical platformlifts



Stairclimbers



Poollifts

Official  
partner of:

**LEHNER**  
LIFTTECHNIK